


Features

- Low Insertion Loss
- High Return Loss
- High Extinction Ratio
- High Reliability
- High Stability

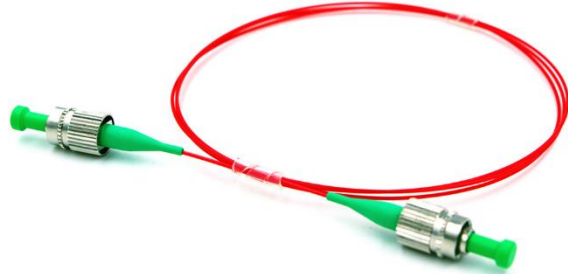


Applications

- Optical Fiber Amplifiers
- Test Instrument
- Fiber Sensor
- Research
- Fiber Laser

Specifications

Parameter		Unit	Value
Connector Type		-	FC, SC, LC
Center Wavelength		nm	1064, 1030, 980
Max. Insertion Loss		dB	0.5
Min. Extinction Ratio at 23°C		dB	23
Min. Return loss	UPC Type	dB	50
	APC Type	dB	60
Fiber Type		-	PM Panda fiber
Key Orientation		-	Slow Axis
Tolerance for Axis Alignment		deg	±3
Operating Temperature		°C	-20~+70



Storage Temperature	°C	-40~+85
---------------------	----	---------

The default connector key is aligned to slow axis.

Ordering Information:PMJP-A-B-C-D-E-FG

A	B	C	D	E	F	G
Wavelength	Axis Alignment	Fiber Type	Pigtail Type	Fiber Length:	Connector for Input	Connector for Output
1064=1064nm 1030=1030nm 980=980nm SSSS=Specify	S=Slow axi F=Fast axis	003=PM980 014=PM1060L SSS=Specify	0=bare fiber 1=900µm loose tube 2=2.0mm loose tube 3=3.0mm loose tube	0.75=0.75m 1.0=1m 2.0=2m 20=20m S=Specify	0=FC/UPC 1=FC/APC 2=SC/UPC 3=SC/APC N=None S=Specify	0=FC/UPC 1=FC/APC 2=SC/UPC 3=SC/APC N=None S=Specify

Part No. Example: PMJP-1064-S-001-0-0.75-11

Description: 1064nm PM Fiber Patchcord, Slow axis, PM980 fiber, bare fiber, 0.75m fibre length, FC/APC connector.

For Custom Parts, please provide detailed description for your requirement.